











The **AGRILITE** Series

AGRILITE 302 / AGRILITE 302 YF











CHARACTERISTICS

	AGRILITE 302	AGRILITE 302 YF
	SCG302R	SCG302H
KIND OF REFRIGERANT		
 AUTOMATIC WORKING CYCLE Without Manual Taps	●	●
 HIGH PRECISION RECOVERY FUNCTION	●	●
 AUTOMATIC OIL INSERTION with scales and with hermetic refillable bottles (OIL LOCK)	●	●
HEATING BELT INCLUDED	✓	✓
USB DOOR	●	●
 LEAK DETECTOR WITH INTEGRATED NITROGEN AND HYDRO-NITROGEN (CFU-NITRO / CFU-NITRO.HD.XX)	✓	✓
INTERNAL DATABASE Oksyslab registration included	●	●
 CAN BE USED WITH HYBRID OR ELECTRIC VEHICLES (quick oil decontamination function) PLS0005.L9	✓	✓
 INTERNAL WASH	✓	✓
 CONFIGURABLE GAS TYPE from HF01234YF to --> R134a O-PK00097	●	●
 BLUETOOTH CONNECTION APP OKSYGEN+	●	●



● STANDARD ✓ OPTION

ACCESSORIES

	CODE	DESCRIPTION	AGRICOLD 302	AGRICOLD 302 YF
	ACC-88.072	Gas bottle adapter ¼	✓	
	ACC-88.011	Straight adapter HP ¼	✓	
	ACC-88-289H	Universal bottle adapter HF01234YF		✓
	O-PK00051 O-PK00051 OPZ	Printer kit	✓	✓
	OPK-00164-OPZ	Pressurization kit	✓	✓
	AOC-007	Support Trolley for AGRILITE	✓	✓
	KTB0013.L1 KTB0015.L1	Kit HP + LP 3 m hoses / Quick couplers (R134a) Kit HP + LP 7,5 m hoses / Quick couplers (R134a)	✓	
	KTB0012.L1 KTB0014.L1	Kit HP + LP 3 m hoses / Quick couplers (HF01234YF) Kit HP + LP 7,5 m hoses / Quick couplers (HF01234YF)		✓
	OAC-0002-KIT	12 V Power supply	✓	✓
	ACC-0004	Antidust blanket	✓	✓




1/2022

NITROGEN LEAK CHECK OR HYDRO-NITROGEN

CODE

CFU-NITRO

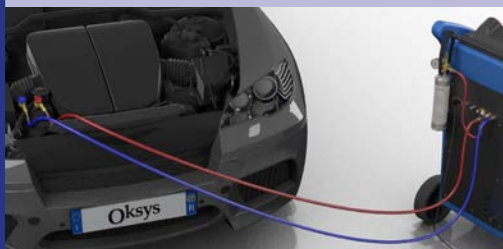


Kit for the connection of 1 or 2.2 liter cylinders to the A/C station - Including:

- Carrying case
- Pressure reducer for 1 and 2.2 liter bottles
- Manifold for the A/C service station connection

CODE

CFU-NITRO.HD.XX

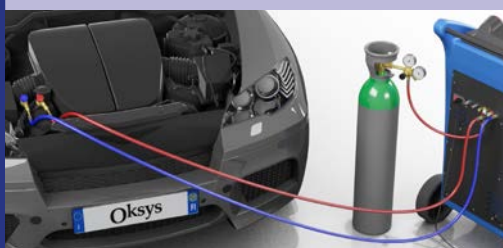

Kit for connection of 200 bar bottle to A/C Station - Inclusive of:

- Carrying case
- Pressure reducer 200 Bar
- Adapter for the connection to 1 and 2,2 L bottles
- Manifold for the A/C service station connection

RANGE

R134a



R1234yf



MODEL

AGRILITE 302

AGRILITE 302 YF

TECHNICAL FEATURES

Display	Graphic LCD 264x64 Pixel	Graphic LCD 264x64 Pixel
Full Recovery Function	YES	YES
Tank Capacity	9 Kg	9 Kg
Heater Belt	Option	Option
Scale Accuracy	+/- 5 g	+/- 5 g
Compressor	10 cc	10 cc
Vacuum Pump	50 L/min	50 L/min
Air Purge	Automatic	Automatic
Power Supply	220V 50 Hz 12V DC	220V 50 Hz 12V DC
Dimensions	50x44x62 cm	50x44x62 cm
Weight	45 Kg	48 Kg
Packaging dimensions	58x54x77 cm	58x54x77 cm

SCOPE OF DELIVERY

Hp LP Quick Couplers	Option	Option
Hoses	Option	Option
Blanket	Option	Option
Power Cord	YES	YES
Calibration Handle	YES	YES
Extra oil bottle	Opzione	Opzione
2 x temperature probes	NO	NO



Rondo d.o.o.
Mihelići 12
51211 Matulji
Hrvatska

tel +385 51 275 089
email - info@rondodoo.hr
web - www.rondodoo.hr
www.hofmann.hr



Oksys

TOTAL DESIGN FOR
BEST PERFORMANCE