


TECHNICAL DATA


Capacity	3500 kg
Effective raise height	2023 mm
Drive over height	60 mm
Piston diameter	123 mm
Piston distance	1785 mm
Installation depth	2408 mm
Motor output	3,0 kW
Power connector	400 V/16 A
Cable length to control	11 m
Lifting time	≈ 35 sec.
Lowering time	≈ 35 sec.

Support Uni 2.35 plus maxi	102642
Support Uni 2.35 plus maxi galvanized	105225
Future Proof Installation cassette STEEL 2530 mm	2530XX
Future Proof Installation cassette STEEL 2530 mm galvanized	2531XX
Lifting unit oil 3,5 t 1785 mm - K pre-assembled in installation cassette	110170
Lifting unit oil 3,5 t 1785 mm - H packed in wooden box	110171
Cover kit for Future Proof Installation cassette	111581


ACCESSORIES

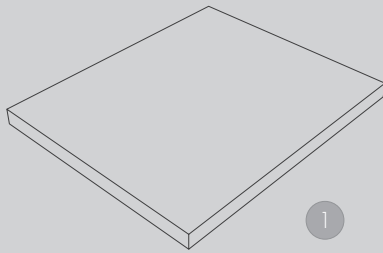


1



2



3



4

1 | Rubber pad
290 x 335 x 20 mm
102275 (1 Set / 4 Pieces)

2 | Rubber pad
120 x 120 x 40 mm
102274 (1 Set / 4 Pieces)

3 | Rubber pad pyramid
70 mm
102273 (1 Set / 4 Pieces)

4 | Rubber pad pyramid
140 mm
102291 (1 Set / 4 Pieces)

Herrmann AG
Bahnhofstrasse 32
D-93483 Pöding

Phone: +49 (0)9461/91388 50
E-Mail: sales@herrmann-lifts.com

www.herrmann-lifts.com